


Components

Energy, Measuring and DIY

Mini Momentary Push-buttons

- Plastic version
- Single-pole, NO contact
- For safety extra-low voltage or signal voltage


Model	Order No.	Colour/colour coding
M-312/BL	01.0340	blue
M-312/GE	01.0350	yellow
M-312/GN	01.0360	green
M-312/RT	01.0370	red
M-312/SW	01.0380	black

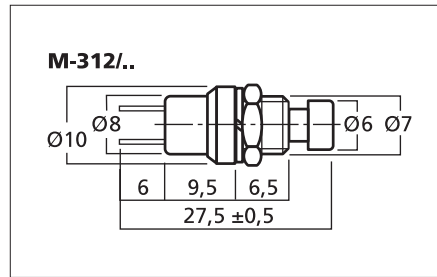

Mini Momentary Push-buttons

- Metal version
- Single-pole, NO contact
- For safety extra-low voltage or signal voltage

Model	Order No.	Colour/colour coding
M-412/BL	01.0430	blue
M-412/RT	01.0460	red
M-412/SW	01.0470	black

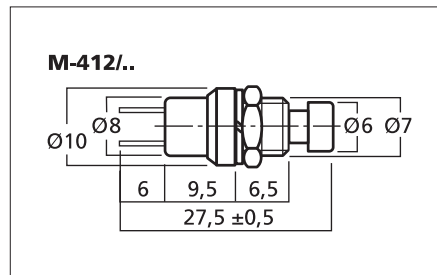


MS-650/RT

Order No. 01.1850



MS-650/SW

Order No. 01.1860



Miniature momentary push-buttons

- 1 x ON/ON
- Hermetically sealed
- PCB connections
- For safety extra-low volt. or signal voltage

• Current rating: 0.4 VA

MS-402/RT

Order No. 01.0790



MS-402/SW

Order No. 01.0800



Micro momentary push-buttons

- Single-pole (NO contact)
- For safety extra-low voltage or signal voltage
- Current rating: 0.5 A

NS-250

Order No. 01.1290

Key switch

- Switching contact, 1 x ON/ON, ~ 150 V/3 A
- Length: 42 mm
- Mounting hole: Ø 19 mm



NS-32

Order No. 01.2910

Momentary key switch

- Contact for momentary action 1 x ON, ~ 150 V/3 A
- Length: 32 mm
- Mounting hole: Ø 19 mm



NS-30

Order No. 01.1300

Key switch

- Switching contact 1 x ON, ~ 150 V/3 A
- Length: 42 mm
- Mounting hole: Ø 19 mm



NS-15

Order No. 01.1280

Key switch

- Switching contact 1 x ON, ~ 120 V/2 A
- Length: 26 mm
- Mounting hole: Ø 12 mm



NRK-325

Order No. 01.1720

Blank key, for key switch NS-30 and NS-250.

