


Components

Energy, Measuring and DIY

CFG-1

Order No. 03.0300


Fan grille, matching 80 mm fans,
e.g. CF-80.



CFG-5

Order No. 03.0310

Fan grille, matching 120 mm fans,
e.g. CF-120M/BB.




CF-80P/VB12V

Order No. 03.2350

Axial fan

- Patented Vapo bearing with MagLev® motor
- Black plastic housing

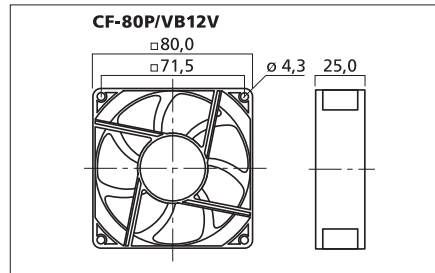


CF-80P/PB24V

Order No. 03.2360

Axial fan

- Sleeve bearing
- Black plastic housing

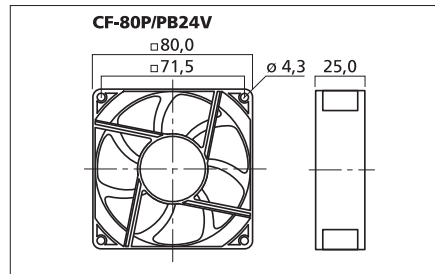


CF-80M/BB

Order No. 03.2340

Axial fan

- Ball bearing
- Black aluminium housing

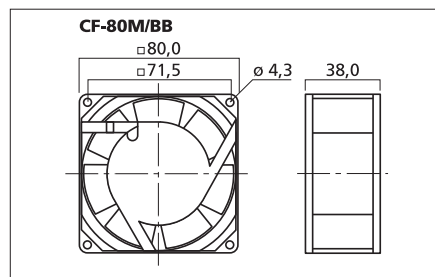


CF-120M/BB

Order No. 03.2330

Axial fan

- Ball bearing
- Black aluminium housing

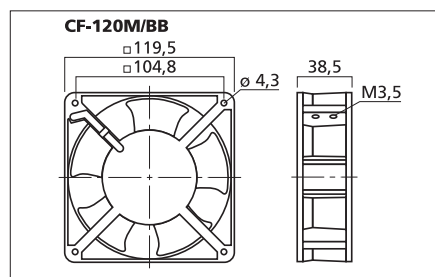

Model	CF-80P/VB12V	CF-80P/PB24V	CF-80M/BB	CF-120M/BB
Air flow rate	56 m³/h	56 m³/h	43 m³/h	190 m³/h
Power supply	= 12 V/90 mA/1.1 W	= 24 V/56 mA/1.3 W	~ 230 V/50 Hz/14 W	~ 230 V/50 Hz/22 W
Starting voltage	= 4.5 V	= 10 V	~ 185 V	~ 185 V
Max. noise level	28 dB	28 dB	32 dB	45 dB
Admiss. ambient temp.	-10-+70 °C	-10-+70 °C	-10-+70 °C	-10-+70 °C
Dimensions	80 x 80 x 25 mm	80 x 80 x 25 mm	80 x 80 x 38 mm	120 x 120 x 38 mm
Weight	77 g	73 g	310 g	510 g